


NEW DEER 2 BESS

FIGURE 3
Zone of Theoretical Visibility With Screening
Effect of Woodland and Settlement

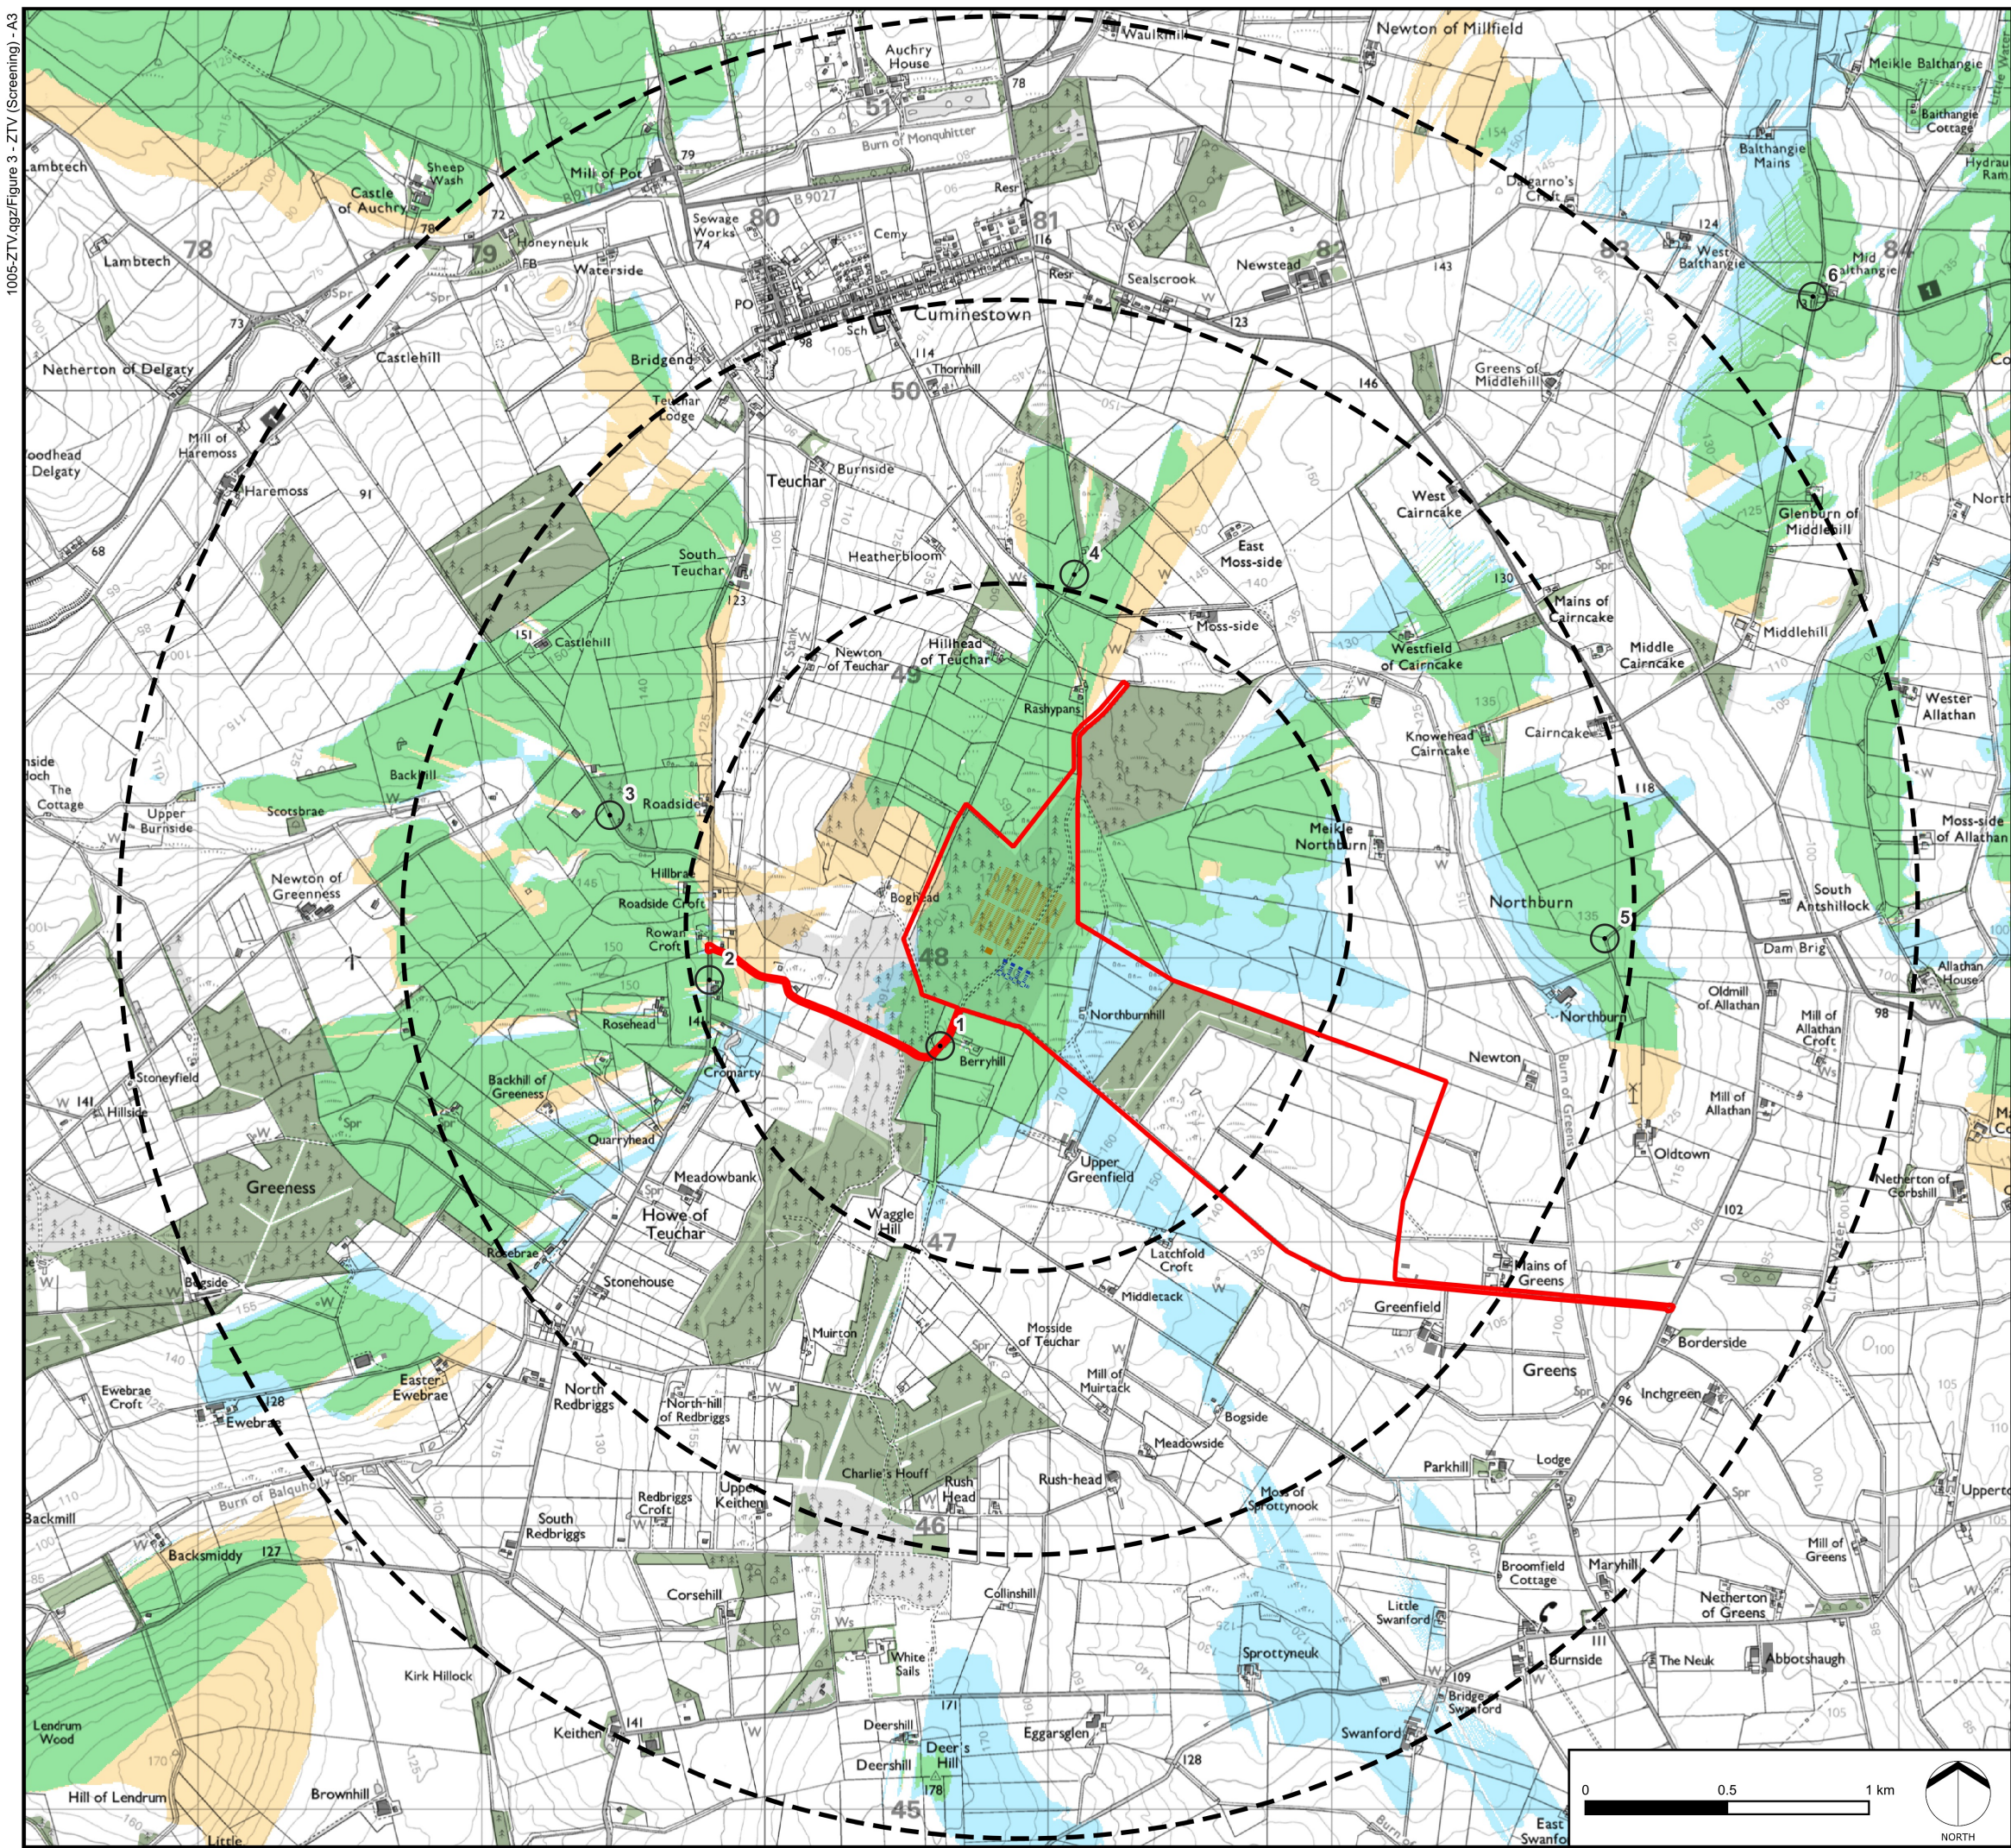

KEY

- Planning Boundary
- Distance Radii from BESS units, Control building and Transformers (1, 2 and 3km)
- Viewpoints
- BESS units, Control building and Water Tanks (modelled at 3.2, 4.9 and 6.79m)
- Transformers (modelled at 8.3m)
- Woodland (modelled at 15m)
- Building (modelled at 7.5m)

Zone of Theoretical Visibility

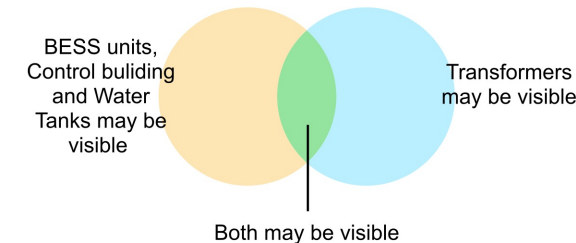


FIGURE DATA:
This figure has been based on the following data:

Layout file: D002-obs-BESS_Units-3.2m+Control-Buildings-4.9m-T5_Proposed_Levels-5.5km + D002-obs-Transformer-8.3m-T5_Proposed_Levels-5.5km
Terrain data: T5-DSM-with-Proposed-Levels
Viewer's eye height: 2m above ground level
Calculation grid size: 5m

NOTES:
This drawing is based upon computer generated Zone of Theoretical Visibility (ZTV) studies produced using the Viewshed routine in the Visibility Analysis plugin for QGIS.

The areas shown are the maximum theoretical visibility, taking into account topography, principal woodlands and buildings.

A digital surface model (DSM) has been derived from OS Terrain 5 height data with the locations of woodland and buildings taken from the OS Open Map Local dataset. Buildings have been modelled with an assumed height of 7.5m and woodland an assumed height of 15m, representing a conservative estimate of average heights within the study area.

The model does not take into account some localised features such as small copses, hedgerows or individual trees and therefore still gives an exaggerated impression of the extent of visibility. The actual extent of visibility on the ground will be less than that suggested by this plan.

The ZTV includes an adjustment that allows for Earth's curvature and light refraction. It is based on a derived DSM and has a 5m² resolution.

Projected Coordinate System: OSGB36 / British National Grid

DATE	SCALE	PAPER	BY	CHK	QA	REV
MAR	1:23,000	A3	TD	MP	RH	-